
COMPONENT PREPARATION

BURST & ZICK C042 / C042 S

Pneumatic cutting, embossing and bending machine for loose or taped axial components

Loose or taped | Pitch 10–70 mm | Embossing tools to order | Changeover < 1 min

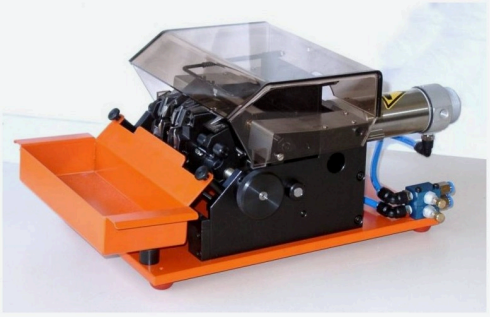

OVERVIEW

Axial components are cut to length and bent to the required pitch before short-lead insertion. On the C042 and C042 S, cut length and pitch are set with adjusting spindles and shown on the scales of the device.

The lead embossing is tool-specific and made to the customer's requirement. The component is placed between the tools by hand and processed with a pneumatic foot switch; changing to another cut length or pitch takes less than a minute.

TECHNICAL SPECIFICATIONS

Pitch	C042 10–70 mm, C042 S 12.5–70 mm
Lead diameter	C042 0.4–0.8 mm, C042 S 0.9–1.3 mm
Components	Loose or taped (manual feeding)
Operation	Pneumatic foot switch
Compressed air	6 bar
Dimensions	420 × 240 × 200 mm
Weight	Approx. 10 kg

Configuration, demo and quotation

InterElectronic supplies this machine in Hungary and Central Europe: application advice, sample tests, installation, training and service.

InterElectronic Hungary, H-2461 Tárnok, Pacsírtamező street 3 D/1

Phone +36 30 296 45 05

Email info@interelectronic.com

Web www.interelectronic.com

Specifications according to Burst & Zick. Subject to change without notice.