
COMPONENT PREPARATION

BURST & ZICK C069 G

Cutting, embossing and bending machine for taped radial components, double tool station

Double tool station | Probing tools | Up to 7,000 pcs/h | Reel or ammo pack

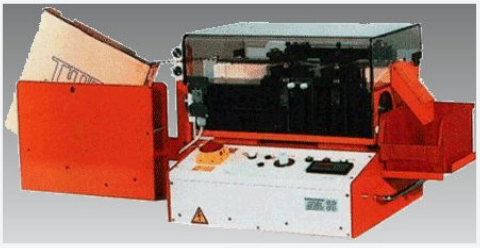

OVERVIEW

The C069 G is fed from reels only, with a combined holder for reel or ammo pack. The punches for one bending form are combined in a tool block that is inserted or changed in a very short time; the drive engages automatically when the block is inserted.

The machine takes two tool blocks, one bending upwards and one downwards. Special probing tools eliminate taping tolerances, so all component tapes to IEC can be processed.

TECHNICAL SPECIFICATIONS

Design	Double tool station, bending up and down
Pitch	2.54, 5.08 and 7.62 mm
Lead diameter	Max. 0.8 mm
Components	Taped
Output	Approx. 7,000 pcs/h without probing, approx. 3,500 pcs/h with probing
Power	230 V / 50 Hz / 250 W
Compressed air	6 bar
Dimensions	1100 (with reel holder) × 450 × 615 mm
Weight	Approx. 67 kg

Configuration, demo and quotation

InterElectronic supplies this machine in Hungary and Central Europe: application advice, sample tests, installation, training and service.

InterElectronic Hungary, H-2461 Tárnok, Pacsírtamező street 3 D/1

Phone +36 30 296 45 05

Email info@interelectronic.com

Web www.interelectronic.com

Specifications according to Burst & Zick. Subject to change without notice.